


Detection Sensors

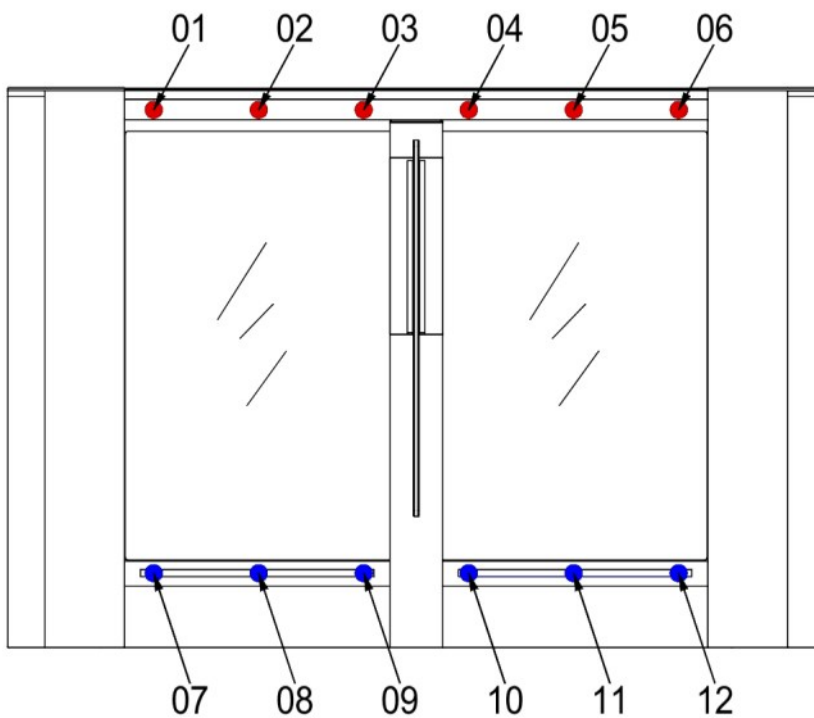

01 to 06
supplied as standard


07 to 12
optional extra

As standard the PG127 is fitted with 6 high level transmit / receive Omron detection sensors to monitor and protect the control zone.

6 optional low level sensors provide increased security and protection for user under 0.9mt tall.

Recommended for all buildings open to the general public, and used by elderly, infirm, disabled, or young children .






SENSOR FUNCTION

Cells in locations 01~06 top row monitor passage, provide security and protection of the obstacle movement during the opening and closing cycle.

Cells in locations 07~12 bottom row provide additional security and protection for user under 0.9mt tall.

SENSOR I/O CONNECTION

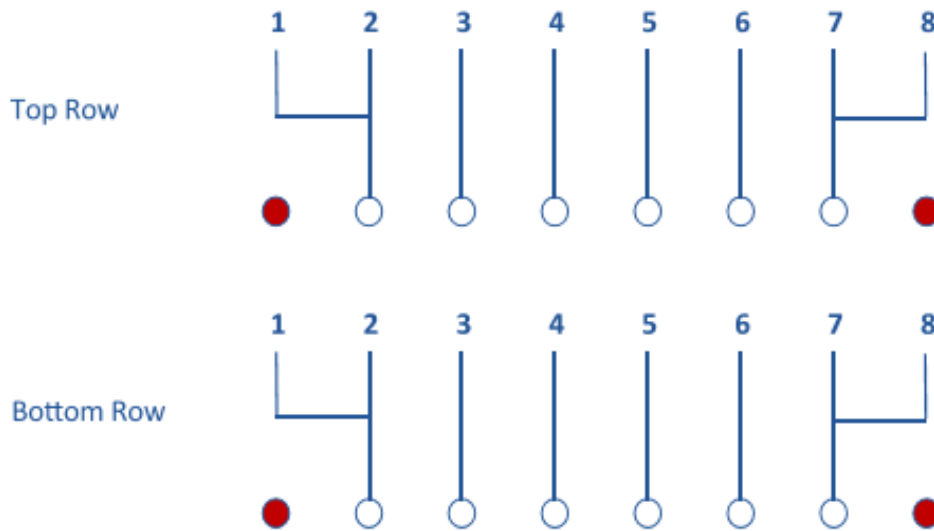

IMPORTANT NOTES

1. The owner/occupier of the building is responsible for undertaking weekly safety checks of the equipment unless a different frequency has been identified in the hazard analysis and risk assessment.
2. For safety reasons it must NOT be assumed the gate is working safely.
3. If a fault is found with a safety device, the gates MUST be switched off and made safe. Use of the gate should not be reinstated until repairs have been undertaken by manufacturer trained personnel.
4. Please refer to the technical manual for more safety notices.

HOW TO CONTACT US

UK Head Office

Evolve Security Products Ltd.

Unit 4, Kenyons Yard,
Weyhill Road,
Andover,
Hampshire.
ENGLAND
SP10 3NP

t: 0044 1264 334786

e: Sales@EvolveSecurityProducts.com

w: EvolveSecurityProducts.com

w: Evolvesp.net

HK Head Office

Evolve Autogate Products Ltd.

Flat C,4/F
Lladro Center,
No., 72 Hoi Yuen Road,
Kwun Tong,
Kowloon.
HONG KONG

t: 00852 35231568

e: info@Evolve-Autogate.com

w: Evolve-Autogate.com

**[Click Here For Full List of
Global Contacts](#)**

“Evolving the way you manage your pedestrian access.”